

4296-51

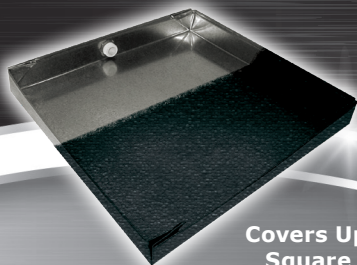



Pan-Spray®
LEAK SEALER & PATCH PRODUCT
BLACK

Waterproof Seal

Rubberized Coating

Protects From Rust and Corrosion

Covers Up To 20
Square Feet!**DANGER**

EXTREMELY FLAMMABLE AEROSOL.
EYE AND SKIN IRRITANT.
HARMFUL OR FATAL IF SWALLOWED.
PRESSURIZED CONTAINER.
See back panel for additional precautionary statements.

For Professional Use Only.
Keep Out Of Reach Of Children.

Net Wt. 16oz. (454 Grams)

FOR USE ON WET OR DRY SURFACES:

Pan-Spray® is an easy-to-use spray that creates a rubberized, waterproof, and flexible seal for condensate pans, cooling towers, and various other applications. It effectively blocks rust and corrosion, making it ideal for permanent and emergency repairs.

VERSATILE APPLICATIONS:

- Condensate Pans
- Cooling Towers
- Swamp Coolers
- Plumping and Pipe Fixtures

DIRECTIONS: For use by HVACR professionals only.

Wear protective clothing and eyewear.



Clean surface of grease, oil, and dirt and ensure it is dry.



Shake well. Spray 10-12" from surface in an even sweeping motion.



Apply using multiple coats, allowing 24-48 hours to dry between coats.

Note: Invert can and spray until only propellant comes out after each use.

ADVANCED DIRECTIONS FOR USE: Apply to clean surface. Spray surface with short, even strokes from 10 to 12 inches from surface. Apply until thoroughly coated. For large holes or cracks apply Pan-Spray around edge of leak, then place a mesh material over leak before final coating is applied. For best results, Pan-Spray should be used at room temperature and applied to a clean surface void of all loose debris. After using, clean spray valve tip by inverting can and spraying until only propellant comes out. Clean up with mineral spirits or paint thinner.

**DANGER**

Extremely flammable aerosol. Pressurized container: may explode if heated. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure.

PREVENTION: Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Do not pierce or burn, even after use. Do not breathe fumes, mists, vapors or spray. Wash thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves, eye protection, face protection, and protective clothing.

RESPONSE: IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician. Do NOT induce vomiting. **IF ON SKIN:** Wash with plenty of soap and water. **IF INHALED:** remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. **IF IN EYES:** Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. IF exposed or concerned: Get medical advice/attention. Get medical advice/attention if you feel unwell. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash it before reuse.

STORAGE: Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50°C / 122°F.

DISPOSAL: Dispose of contents/container to an appropriate treatment and disposal facility in accordance with applicable laws and regulations, and product characteristics at time of disposal.

CONTAINS (CAS No): Toluene (108-88-3), Dimethyl Ether (115-10-6), Naphtha, (Petroleum), Hydrotreated Light (64742-49-0), Acetone (67-64-1), Propane (74-98-6).

WARNING: This product can expose you to chemicals including Methyl isobutyl ketone, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



1 20LP95



MADE IN THE
USA
WITH GLOBALLY
SOURCED MATERIALS

Manufactured for: Nu-Calgon
2611 Schuetz Rd.
St. Louis, MO 63043
Customer Service: 800-554-5499
Chemical Emergency: 800-424-9300
www.nucalgon.com
Calgon is a licensed trade name.
(0725)