

 Nu-Calgon

LED

NuStart™

Compressor Soft Starter

5010-10

110/115 VAC, Single Phase
50/60 Hz., 12-20A FLA/RLA


Requires a Contactor

Use Flat blade or #2 Pozzi Screwdriver.
Tightening torque
11.5 lb-in (1.3Nm)

L
Field Supply

T
Contactor
1p/2p

Starts on
contactor closure

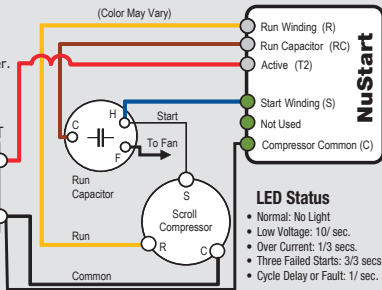

A2L
READY

CE

Scan To
Learn More



WARNING

Allow 2 minutes to
discharge run capacitor
before disconnecting



AVERTISSEMENT

Laisser 2 minutes pour décharger le
condensateur avant de déconnecter

RUN
WINDING
(R)



RUN
CAPACITOR
(RC)



ACTIVE
(T2)



START
WINDING
(S)



COMPRESSOR
COMMON
(C)

NOT
USED

