

Final Unwind 3

5.9062" Across
5.3967"
1.31

CL&D
08/24 8-3000PL

4087-03

Nu-Calgon


Zinc Rich

COLD GALVANIZING

Prevents Rust and Inhibits Corrosion

Protects and Repairs Metals

Active Ingedient Contains 95%-Pure Zinc

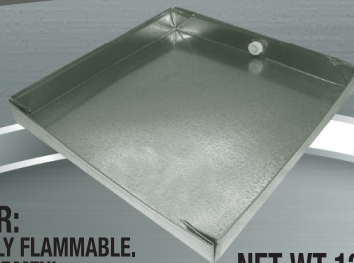

DANGER:
EXTREMELY FLAMMABLE.
VAPOR HARMFUL.
CONTENTS UNDER PRESSURE.
Read precautions on back of can.

NET WT 12 oz (340 g)
FOR PROFESSIONAL USE ONLY.

ZINC RICH COLD GALVANIZING

The active ingredient used in this product contains a minimum of 95%-pure zinc.

This complete zinc metal spray rustproofs any metal surface, providing protection that lasts for years. It protects against corrosion through galvanic action when applied to properly prepared metal surfaces.

Coated surfaces can be welded safely without risk of fire or fumes. Ideal for use as a protective finish or corrosion protectant on storage tanks, trailers, fencing, metal roofs and gutters, springs and coils, auto and truck bodies, pipelines, exhaust stacks, metal doors, boxes and equipment. May be used as a paint or primer touch-up, for flood restoration and repair jobs, for damaged galvanized steel or any metal surface needing protection against salt, moisture, heat and other environmental conditions, for industrial maintenance, repairing hot dip galvanizing, heating and air conditioning ducts, industrial and construction vehicle bodies, farm machinery, ships and marine equipment, weldments and piping. For best results, use only when temperature is 65°F (18°C) or greater.

Conforms to the following military specifications: MIL-P-21035 U.S.A.F. - MIL-P-26915A - MIL-P-46105.

WARNING! If you scrape, sand or remove the old coating, you may release lead dust. LEAD IS TOXIC. Contact the National Lead Information Hotline at 1-800-424-LEAD (5323) or log on to www.epa.gov/lead.

DIRECTIONS - SHAKE WELL BEFORE USING

Completely remove loose rust or other evidence of corrosion. Make sure surface is clean, dry and oil-free. Shake can until ball rattles and continue for an additional 60 seconds. Hold can 12 inches from surface and spray with even, sweeping strokes. Two quick, thin coats give best results. When finished, invert can and clear nozzle. Product will dry in 10 minutes and can be painted over after drying overnight.

DANGER: EXTREMELY FLAMMABLE MIXTURE. Keep from heat, sparks and open flame. Contents under pressure. DO NOT PUNCTURE, INCINERATE (BURN) OR STORE ABOVE 122°F (50°C). Exposure to heat or prolonged exposure to sun may cause bursting. Contains Toluene and Petroleum Distillates. Vapor harmful. Use in a well-ventilated area only. **WHEN USING INDOORS, KEEP WINDOWS AND DOORS OPEN UNTIL FUMES DISSIPATE.** Avoid contact with eyes, prolonged or repeated contact with skin or continuous breathing of vapor or spray mist. In case of eye contact, immediately flush thoroughly with water and get medical attention. If accidentally swallowed, do not induce vomiting. Call a physician immediately.

SUPPLEMENTARY INFORMATION: 8.486% of this mixture consists of ingredient(s) of unknown toxicity. Prevent this container from coming in contact with water for a prolonged period of time. Always keep container in a cool, dry place. Recycle empty can where available or discard in the trash.

NOTICE: Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. To avoid breathing vapor or spray mist, open windows and doors or use other means to ensure fresh air entry during application and drying. If you experience eye watering, headaches or dizziness, increase fresh air or wear an appropriate, properly fitted respirator (NIOSH approved) during and after application or leave the area. Follow respirator manufacturer's directions for respirator use.

WARNING: This product can expose you to chemicals including ethyl benzene, which is known to the State of California to cause cancer, and toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

MADE IN THE USA
8-3000PL



THE USER OF THIS PRODUCT ASSUMES ALL RISKS OF USE, STORAGE AND HANDLING NOT IN ACCORDANCE WITH ITS DIRECTIONS AND CAUTIONS.

This product contains: Acetone (CAS# 67-64-1), Butane (CAS# 106-97-8), Ethyl Benzene (CAS# 100-41-4), Light Aromatic Naphtha (CAS# 64742-95-6), Low Odor Mineral Spirits (CAS# 64742-47-8), Propane (CAS# 74-98-6), Toluene (CAS# 108-88-3), Zn Dust (CAS# 7440-66-6).

Nu-Calgon Zinc Rich Cold Galvanizing

DANGER



HARMFUL IF INHALED. Causes serious eye irritation.

Suspected of causing cancer. Suspected of damaging fertility or the unborn child. May cause drowsiness or dizziness. May cause damage to organs through prolonged or repeated exposure. May be fatal if swallowed and enters airways. EXTREMELY FLAMMABLE AEROSOL. Contains gas under pressure; may explode if heated.

Prevention

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves, protective clothing, eye protection and face protection. Use only outdoors or in a well-ventilated area. Wash face, hands and any exposed skin thoroughly after handling. Do not breathe fumes, mist, vapors or spray. Keep away from heat, sparks, open flames and hot surfaces. No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use.

Response

IF EXPOSED OR CONCERNED: Get medical advice/attention. Specific treatment: See additional cautionary statements on this label. **IF IN EYES:** Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. **IF INHALED:** Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor if you feel unwell. **IF SWALLOWED:** Immediately call a POISON CENTER or doctor. Do NOT induce vomiting.

Storage

Store locked up. Store in a well-ventilated place. Keep container tightly closed. Protect from sunlight. Do not expose to temperatures exceeding 50°C (122°F).

Disposal

Dispose of contents/container to an approved waste disposal plant.

SEE SAFETY DATA SHEET (SDS) FOR ADDITIONAL INFORMATION ON THIS PRODUCT.

Nu-Calgon

2611 Schuetz Rd. • St. Louis, MO 63043 • 800-554-5499

PRIMER - PWMIR EPA 1.2 g 03 /g product MAX
PWMIR CA 0.70 g 03 /g product MAX

KEEP OUT OF REACH OF CHILDREN

Distributed by:
Nu-Calgon

2611 Schuetz Rd. • St. Louis, MO 63043
Customer Service: 800-554-5499
Chemical Emergency: 800-424-9300
www.nucalgon.com
(0924) Calgon is a licensed trade name.



8.625" Around